


Wafer Butterfly Valve

Features

- Wafer bolt pattern, suitable for most flanges (including Table E, PN10-16 and ANSI 150)
- Maximum nominal working pressure 230PSI / 16Bar
- EPDM seal temperature rating -20°C to 120°C
- EPDM is suitable for hot water, steam, alcohols, coolants, acids and bases.
- Lockable Lever with 10 position stainless steel notch plate
- PCD is measured from a range of smallest to largest PCD (measured with Table E, PN10-16 and ANSI 150)

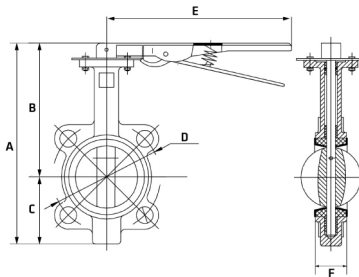

Dimensions

Unit: mm (unless stated otherwise)

Size	2" DN50	2 1/2" DN65	3" DN80	4" DN100	5" DN125	6" DN150	8" DN200
A	230	250	270	302	335	370	452
B	163	170	177	194	215	230	280
C	67	80	93	108	120	140	172
D	114-125	127-145	146-160	178-190.5	210-215.9	235-241.3	292-298.5
E	220	220	220	260	260	260	365
F	42	45	44.2	51.1	54.5	54.8	59.6
Code	CIWBV50	CIWBV65	CIWBV80	CIWBV100	CIWBV125	CIWBV150	CIWBV200

Size	10" DN250	12" DN300
A	530	605
B	322	361
C	208	244
D	350-362	400-431.8
E	365	510
F	67	75.9
Code	CIWBV250	CIWBV300

