sales@themetalcompany.co.nz

Standard ANSI 150 Flange Gasket

Features

- To suit ANSI 150 Flange stud pattern
- Black Insertion Rubber
- Manufactured with cotton reinforcement to assist tensile strength and tear resistance
- Temperature rating -25°C to 70°C

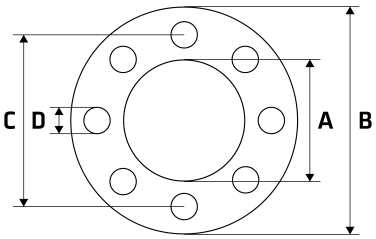

Dimensions

Unit: mm (unless stated otherwise)

Size	1/2" 15NB	3/4" 20NB	1" 25NB	1 1/4" 32NB	1 1/2" 40NB	2" 50NB	2 1/2" 65NB
A	21	27	33	42	48.4	60.3	73
B	89	98	108	118	127	152	178
C	60	70	79	89	98	121	140
D	4X16MM	4X16MM	4X16MM	4X16MM	4X16MM	4X19MM	4X19MM
Holes	4	4	4	4	4	4	4
Thickness	3.2	3.2	3.2	3.2	3.2	3.2	3.2
Code	RFG15A150	RFG20A150	RFG25A150	RFG32A150	RFG40A150	RFG50A150	RFG65A150

Size	3" 80NB	4" 100NB	5" 125NB	6" 150NB	8" 200NB	10" 250NB	12" 300NB
A	89	114.3	141.3	168	219	273	324
B	191	229	245	279	343	406	483
C	152	191	216	241	299	362	432
D	4X19MM	8X19MM	8X22MM	8X22MM	8X22MM	12X25MM	12X25MM
Holes	4	8	8	8	8	12	12
Thickness	3.2	3.2	3.2	3.2	3.2	3.2	3.2
Code	RFG80A150	RFG100A150	RFG125A150	RFG150A150	RFG200A150	RFG250A150	RFG300A150