


Blind Flange ANSI150

ASME B16.5, ASTM A182

Features

- Also known as a Blanking Flange
- Manufactured to ASME B16.5 ANSI150 Standard (*)
- Forged to ASTM A182
- Raised Face Blind Flange (RFBL/BLRF) (*)
- All sharp edges have been chamfered by 0.5 mm at 45°
- (*) Please note that some older stock is Flat Faced, and does not meet Standard thickness. Refer to items missing 'E' measurement. New stock will replace this, and will be Raised Face and meet Standard thickness

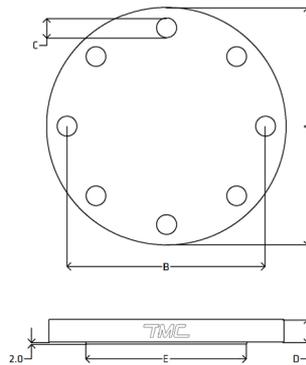

Dimensions

Unit: mm (unless stated otherwise)

Size	1/2" 15NB	3/4" 20NB	1" 25NB	1 1/4" 32NB	1 1/2" 40NB	2" 50NB	2 1/2" 65NB
A	90.0	100.0	110.0	115.0	125.0	150.0	180.0
B	60.3	69.9	79.4	88.9	98.4	120.7	139.7
C	4x15.88	4x15.88	4x15.88	4x15.88	4x15.88	4x19.05	4x19.05
D	9.6	11.2	12.7	9.0	15.9	17.5	10.0
E	34.9	42.9	50.8	-	73.0	92.1	-
Thickness	9.6	11.2	12.7	9.0	15.9	17.5	10.0
Code	SBF15A150	SBF20A150	SBF25A150	SBF32A150	SBF40A150	SBF50A150	SBF65A150

Size	3" 80NB	4" 100NB	5" 125NB	6" 150NB	8" 200NB	10" 250NB	12" 300NB
A	190.0	230.0	255.0	280.0	345.0	405.0	485.0
B	152.4	190.5	215.9	241.3	298.5	362.0	431.8
C	4x19.05	8x19.05	8x22.22	8x22.22	8x22.22	12x25.4	12x25.4
D	22.3	22.3	12.0	23.9	13.0	28.6	30.2
E	127.0	157.2	-	215.9	-	323.8	381.0
Thickness	22.3	22.3	12.0	23.9	13.0	28.6	30.2
Code	SBF80A150	SBF100A150	SBF125A150	SBF150A150	SBF200A150	SBF250A150	SBF300A150

