


# Piston Check Valve

Stainless Grade 316

## Features

- BSP threaded ends
- Maximum pressure 800PSI / 55Bar
- Maximum working temperature 230°C
- PTFE seal maximum temperature 250°C

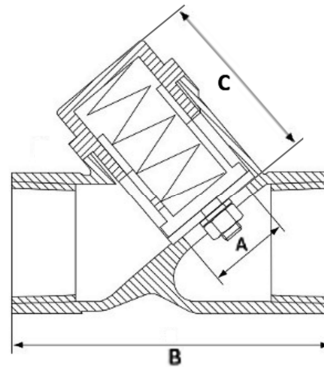

## Dimensions

Unit: mm (unless stated otherwise)

Size	6.35 1/4"	9.53 3/8"	12.7 1/2"	19.05 3/4"	25.4 1"	31.8 1 1/4"	38.1 1 1/2"	50.8 2"	63.5 2 1/2"	76.2 3"
A	11.6	12.5	12.5	18	23.5	31.4	35.7	45.5	60	76
B	65.5	65.5	65.5	75.5	90.5	111	121	151	190	220
C	31	31	31	40	50	55	70.5	87	118	136
Code	SPCV06	SPCV09	SPCV12	SPCV20	SPCV25	SPCV30	SPCV40	SPCV50	SPCV65	SPCV75



# Y Strainer

Stainless Grade 316

## Features

- BSP threaded ends
- Maximum pressure 800PSI / 55Bar
- Maximum working temperature 230°C
- Stainless steel body and mesh
- No seal

"Replacement mesh filters available"

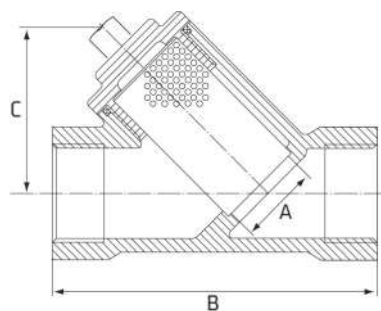

Unit: mm (unless stated otherwise)

## Dimensions

Size	6.35 1/4"	9.53 3/8"	12.7 1/2"	19.05 3/4"	25.4 1"	31.8 1 1/4"	38.1 1 1/2"	50.8 2"	63.5 2 1/2"	76.2 3"	101.6 4"
A	10	12	15	20	25	32	40	50	65	78	100
B	65	65	65	80	90	105	120	140	180	200	240
C	39	39	39	45	52	58	72	80	96.5	118	155
D	1	1	1	1	1	1	1	1	1	1	1
E	2	2	2	2	2	2	2	2	2	2	2
Code (Valve)	SYS06	SYS09	SYS12	SYS20	SYS25	SYS30	SYS40	SYS50	SYS65	SYS75	SYS100
Code (Mesh)	SYSM06	SYSM09	SYSM12	SYSM20	SYSM25	SYSM30	SYSM40	SYSM50	SYSM65	SYSM75	SYSM100

