


RJT Union Blank

Stainless Grade 316

Features

- Used for blanking the union

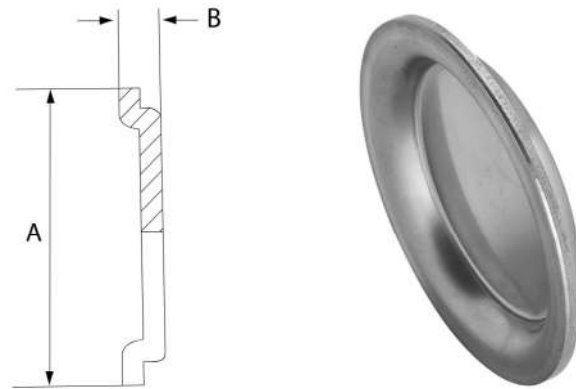

Dimensions

Unit: mm (unless stated otherwise)

Size	12.7 1/2"	19.05 3/4"	25.4 1"	31.8 1 1/4"	38.1 1 1/2"	50.8 2"	63.5 2 1/2"	76.2 3"	101.6 4"	127 5"	152.4 6"
A	17	24	42	48	55	67	80	93	118	144	168
B	7.5	7.5	8.5	8.5	8.5	8.5	8.5	8.5	8.5	8.5	8.5
Code	RJTUB612	RJTUB620	RJTUB625	RJTUB630	RJTUB640	RJTUB650	RJTUB665	RJTUB675	RJTUB6100	RJTUB6125	RJTUB6150

RJT Stepped Seal

Nitrile (NBR) and EPDM

Features

- Nitrile temperature rating 100°C
- Nitrile is suitable for oils, hydrocarbon fuels, hydraulic fluids, fats and flame retardant liquids
- EPDM temperature rating 120°C
- EPDM is suitable for hot water, steam, alcohols, coolants, acids and bases

"1/2" and 3/4" sizes require a flat seal"



Dimensions

Unit: mm (unless stated otherwise)

Size	12.7 1/2"	19.05 3/4"	25.4 1"	31.8 1 1/4"	38.1 1 1/2"	50.8 2"	63.5 2 1/2"	76.2 3"	101.6 4"	127 5"	152.4 6"
A	16	21	33.3	39.7	46	58.7	71.4	84.1	109.5	134.9	160.3
B	3.5	3.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	13.5	13.5
Code (NBR)	RJTSS12	RJTSS20	RJTSS25	RJTSS30	RJTSS40	RJTSS50	RJTSS65	RJTSS75	RJTSS100	RJTSS125	RJTSS150
Code (EPDM)	RJTSS12E	RJTSS20E	RJTSSE25E	RJTSSE30E	RJTSSE40E	RJTSSE50E	RJTSSE65E	RJTSSE75E	RJTSSE100E	RJTSSE125E	RJTSSE150E