


# BSP Hex Bush

## Features

- BSP Threaded Ends
- Working Pressure: 150lbs (psi) / 10bar
- Working Temperature: 250°C at 10bar
- Investment lost wax casting manufactured to ISO 9001 : 2015
- BSP thread conforms with ISO 7-1/ISO 228-1
- Male Threads are Tapered (BSPT), Female Threads are Parallel (BSPP)
- Mill Test Certificates (EN10201 Type 2.2) available with all sizes

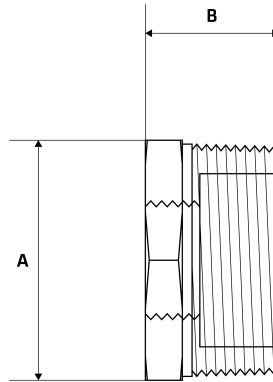

## Dimensions

Unit: mm (unless stated otherwise)

Size	1/4"x1/8" 8NBx6NB	3/8"x1/8" 10NBx6NB	3/8"x1/4" 10NBx8NB	1/2"x1/8" 15NBx6NB	1/2"x1/4" 15NBx8NB	1/2"x3/8" 15NBx10NB	3/4"x1/4" 20NBx8NB
A	17	19.8	17.5	23	22.9	22.9	27.5
B	16.9	17	20	21	21	21	22
Code	SB0806	SB1006	SB1008	SB1506	SB1508	SB1510	SB2008
Size	3/4"x3/8" 20NBx10NB	3/4"x1/2" 20NBx15NB	1"x1/4" 25NBx8NB	1"x3/8" 25NBx10NB	1"x1/2" 25NBx15NB	1"x3/4" 25NBx20NB	1 1/4"x1/4" 32NBx8NB
A	28	28	35	35	36.8	36.8	44.7
B	25.4	25.4	25	25	27.5	27.5	27
Code	SB2010	SB2015	SB2508	SB2510	SB2515	SB2520	SB3208
Size	1 1/4"x3/8" 32NBx10NB	1 1/4"x1/2" 32NBx15NB	1 1/4"x3/4" 32NBx20NB	1 1/4"x1" 32NBx25NB	1 1/2"x1/4" 40NBx8NB	1 1/2"x1/2" 40NBx15NB	1 1/2"x3/4" 40NBx20NB
A	44.7	44.7	44.7	44.7	49.7	49	49.7
B	27	27.5	27	27	30.5	27.5	31.5
Code	SB3210	SB3215	SB3220	SB3225	SB4008	SB4015	SB4020
Size	1 1/2"x1" 40NBx25NB	1 1/2"x1 1/4" 40NBx32NB	2"x1/4" 50NBx8NB	2"x1/2" 50NBx15NB	2"x3/4" 50NBx20NB	2"x1" 50NBx25NB	2"x1 1/4" 50NBx32NB
A	49.7	49.7	61.7	61.5	61.7	61.7	61.5
B	30.5	30.5	34.3	32.5	34.3	34.3	32.5
Code	SB4025	SB4032	SB5008	SB5015	SB5020	SB5025	SB5032
Size	2"x1 1/2" 50NBx40NB	2 1/2"x1 1/2" 65NBx40NB	2 1/2"x2" 65NBx50NB	3"x2" 80NBx50NB	3"x2 1/2" 80NBx65NB	4"x2" 100NBx50NB	4"x2 1/2" 100NBx65NB
A	61.7	77.7	76.5	90.4	90.4	116	116.2
B	34.3	38	36	39	39	45	42
Code	SB5040	SB6540	SB6550	SB8050	SB8065	SB10050	SB10065



# BSP THREADED FITTINGS

[sales@themetalconpany.co.nz](mailto:sales@themetalconpany.co.nz)

<b>Size</b>	4"x3" 100NBx80NB
<b>A</b>	116
<b>B</b>	45
<b>Code</b>	SB10080

