


BSP Hex Back Nut

Features

- Use With Nippling Tube
- Female BSP thread (parallel), which conforms with ISO 7-1/ISO 228-1
- Investment lost wax casting manufactured to ISO 9001
- Working Pressure: 10.3 bar (150.0 PSI)
- Working Temperature: 250°C at 10.3 bar (150.0 PSI)
- Bursting Pressure: Unavailable
- Mill Test Certifications available for all sizes (EN 10201 Type 2.2)

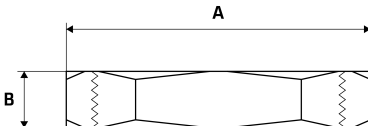

Dimensions

Unit: mm (unless stated otherwise)

Size	1/8" 6NB	1/4" 8NB	3/8" 10NB	1/2" 15NB	3/4" 20NB	1" 25NB	1 1/4" 32NB
A	16	18	24	30	34.5	41.1	50.2
B	6.5	7.5	7.7	8.5	9	9	12
Code	SN06	SN08	SN10	SN15	SN20	SN25	SN32

Size	1 1/2" 40NB	2" 50NB	2 1/2" 65NB	3" 80NB	4" 100NB
A	58.2	69.9	89	102.3	128
B	12	13	14.5	17.3	18
Code	SN40	SN50	SN65	SN80	SN100

