


BSP Tank Skin Fittings

Features

- Includes an EPDM O-Ring seal (Temperature Rating: 120°C)
- Female BSP thread (tapered), which conforms with ISO 7-1/ISO 228-1
- This has a tapered thread to ensure it is installed facing the correct direction
- Investment lost wax casting manufactured to ISO 9001
- Working Pressure: 10.3 bar (150.0 PSI)
- Working Temperature: 120°C at 10.3 bar (150.0 PSI)
- Bursting Pressure: Unavailable
- Mill Test Certifications available for all sizes (EN 10201 Type 2.2)

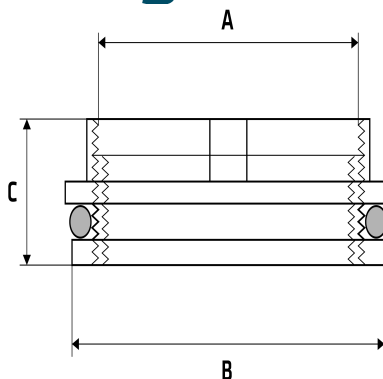

Dimensions

Unit: mm (unless stated otherwise)

Size	1" 25NB	1 1/2" 40NB	2" 50NB
A	34	50	62
B	44.9	60	74
C	17.5	17.5	20.5
Code	SSF25#	SSF40#	SSF50#

