


BSP Hex Reducing Nipple

Features

- BSP Threaded Ends
- Working Pressure: 150lbs (psi) / 10bar
- Working Temperature: 250°C at 10bar
- Investment lost wax casting manufactured to ISO 9001 : 2015
- BSP thread conforms with ISO 7-1/ISO 228-1
- Male Threads are Tapered (BSPT)
- Mill Test Certificates (EN10201 Type 2.2) available with all sizes

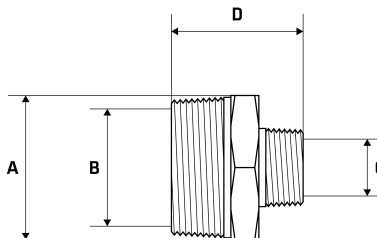

Dimensions

Unit: mm (unless stated otherwise)

Size	1/4"x1/8" 8NBx6NB	3/8"x1/8" 10NBx6NB	3/8"x1/4" 10NBx8NB	1/2"x1/8" 15NBx6NB	1/2"x1/4" 15NBx8NB	1/2"x3/8" 15NBx10NB	3/4"x3/8" 20NBx10NB
A	15	18.9	18.9	22.8	22.8	22.8	27.8
B	7	9.3	9.3	14.4	14.4	14.4	19.5
C	5	5	6.5	5	6.5	9.3	9.3
D	29.5	29	34	36.5	32	38.3	41.3
Code	SHRN0806	SHRN1006	SHRN1008	SHRN1506	SHRN1508	SHRN1510	SHRN2010

Size	3/4"x1/2" 20NBx15NB	1"x1/2" 25NBx15NB	1"x3/4" 25NBx20NB	1 1/4"x3/4" 32NBx20NB	1 1/4"x1" 32NBx25NB	1 1/2"x1/2" 40NBx15NB	1 1/2"x3/4" 40NBx20NB
A	27.5	34	36.8	45	45	50	50
B	19.5	24.4	24.4	32.5	32.5	38.4	38.4
C	14.4	14.4	19.5	19.5	24.4	14.4	19.5
D	37	41.5	46.5	49	51	43.5	49.5
Code	SHRN2015	SHRN2515	SHRN2520	SHRN3220	SHRN3225	SHRN4015	SHRN4020

Size	1 1/2"x1" 40NBx25NB	1 1/2"x1 1/4" 40NBx32NB	2"x1" 50NBx25NB	2"x1 1/4" 50NBx32NB	2"x1 1/2" 50NBx40NB	2 1/2"x1 1/2" 65NBx40NB	2 1/2"x2" 65NBx50NB
A	50	50	61.8	61	61.8	77.8	76.5
B	38.4	38.4	50.3	50.3	50.3	65	65
C	24.4	32.5	24.4	32.5	38.4	38.4	50.3
D	51.5	53.5	56.5	54.5	59	62.5	61.5
Code	SHRN4025	SHRN4032	SHRN5025	SHRN5032	SHRN5040	SHRN6540	SHRN6550



Size	3"x2" 80NBx50NB	3"x2 1/2" 80NBx65NB	4"x2" 100NBx50NB	4"x2 1/2" 100NBx65NB	4"x3" 100NBx80NB
A	91.7	91.7	117	117	117
B	77	77	102	102	102
C	65	65	50.5	65	77
D	68.5	71	75	76	82.5
Code	SHRN8050	SHRN8065	SHRN10050	SHRN10065	SHRN10080

