


BSP Reducing Socket

Features

- BSP Threaded Ends
- Working Pressure: 150lbs (psi) / 10bar
- Working Temperature: 250°C at 10bar
- Investment lost wax casting manufactured to ISO 9001 : 2015
- BSP thread conforms with ISO 7-1/ISO 228-1
- Female Threads are Parallel (BSPP)
- Mill Test Certificates (EN10201 Type 2.2) available with all sizes

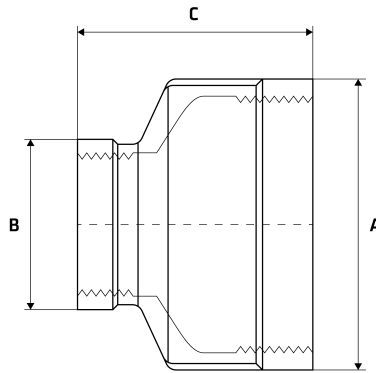

Dimensions

Unit: mm (unless stated otherwise)

Size	1/4"x1/8" 8NBx6NB	3/8"x1/8" 10NBx6NB	3/8"x1/4" 10NBx8NB	1/2"x1/8" 15NBx6NB	1/2"x1/4" 15NBx8NB	1/2"x3/8" 15NBx10NB	3/4"x3/8" 20NBx10NB
A	17.3	21	21	26.8	26.8	26.8	32.3
B	14	14	18	14	18	21	21
C	26.6	28.9	29	31	34.2	34.7	36.7
Code	SRS0806	SRS1006	SRS1008	SRS1506	SRS1508	SRS1510	SRS2010

Size	3/4"x1/2" 20NBx15NB	1"x1/2" 25NBx15NB	1"x3/4" 25NBx20NB	1 1/4"x1" 32NBx25NB	1 1/2"x3/4" 40NBx20NB	1 1/2"x1" 40NBx25NB	1 1/2"x1 1/4" 40NBx32NB
A	32.2	38	39.8	49	53.5	55.8	55.8
B	26.8	25	32.3	39.8	32.3	39.8	49
C	36.7	36.5	42.2	47	47.5	50	51.7
Code	SRS2015	SRS2515	SRS2520	SRS3225	SRS4020	SRS4025	SRS4032

Size	2"x1" 50NBx25NB	2"x1 1/4" 50NBx32NB	2"x1 1/2" 50NBx40NB	2 1/2"x2" 65NBx50NB	3"x2" 80NBx50NB	3"x2 1/2" 80NBx65NB	4"x2" 100NBx50NB
A	68	66	68	90	100	98	127
B	39.8	47	55.8	68	68	90	68
C	55	59.2	51.5	61	65.5	71.5	71
Code	SRS5025	SRS5032	SRS5040	SRS6550	SRS8050	SRS8065	SRS10050



Size	4"x2 1/2" 100NBx65NB	4"x3" 100NBx80NB
A	127	122.5
B	90	100
C	71.5	77
Code	SRS10065	SRS10080

