


# PN10-40 Flange Gasket

## Features

- To suit PN10-16 Flange stud pattern
- Black Insertion Rubber
- Manufactured with cotton reinforcement to assist tensile strength and tear resistance
- Temperature rating -25°C to 70°C

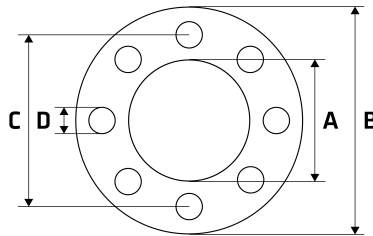

## Dimensions

Unit: mm (unless stated otherwise)

Size	1/2" 15NB	3/4" 20NB	1" 25NB	1 1/4" 32NB	1 1/2" 40NB	2" 50NB	2 1/2" 65NB
<b>A</b>	22	28	38	43	53	61	81
<b>B</b>	95	105	111	140	146	165	181
<b>C</b>	65	75	85	100	110	125	145
<b>D</b>	4X14MM	4X14MM	4x18mm	4X18MM	4X22MM	4X18MM	8X22MM
<b>Thickness</b>	3.2	3.2	3.2	3.2	3.2	3.2	3.2
<b>Code</b>	RFG15PN10-40	RFG20PN10-40	RFG25PN10-40	RFG32PN10-40	RFG40PN10-40	RFG50PN10-16	RFG65PN10-16

Size	3" 80NB	4" 100NB	5" 125NB	6" 150NB	8" 200NB	10" 250NB	12" 300NB
<b>A</b>	90	120	141	166	225	280	325
<b>B</b>	200	216	250	279	336	401	460
<b>C</b>	160	180	210	240	295	355	410
<b>D</b>	8X18MM	8X22MM	8X18MM	8X22MM	12X26MM	12x30mm	12X26MM
<b>Thickness</b>	3.2	3.2	3.2	3.2	3.2	3.2	3.2
<b>Code</b>	RFG80PN10-16	RFG100PN10-16	RFG125PN10-16	RFG150PN10-16	RFG200PN16	RFG250PN16	RFG300PN16

