


# ANSI150 Flange Gasket

## Features

- To suit ANSI150 Flange stud pattern
- Black Insertion Rubber
- Manufactured with cotton reinforcement to assist tensile strength and tear resistance
- Temperature rating -25°C to 70°C

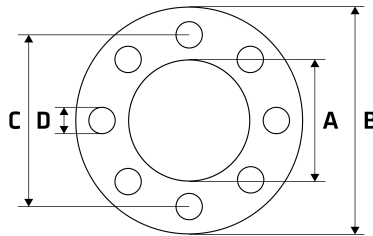

## Dimensions

Unit: mm (unless stated otherwise)

Size	1/2" 15NB	3/4" 20NB	1" 25NB	1 1/4" 32NB	1 1/2" 40NB	2" 50NB	2 1/2" 65NB
<b>A</b>	21	27	33	42	48.4	60.3	73
<b>B</b>	89	98	108	118	127	152	178
<b>C</b>	60	70	79	89	98	121	140
<b>D</b>	4X16MM	4X16MM	4X16MM	4X16MM	4X16MM	4X19MM	4X19MM
<b>Thickness</b>	3.2	3.2	3.2	3.2	3.2	3.2	3.2
<b>Code</b>	RFG15A150	RFG20A150	RFG25A150	RFG32A150	RFG40A150	RFG50A150	RFG65A150

Size	3" 80NB	4" 100NB	5" 125NB	6" 150NB	8" 200NB	10" 250NB	12" 300NB
<b>A</b>	89	120	141.3	168	225	280	324
<b>B</b>	191	226	253	279	341	401	483
<b>C</b>	152	190.5	216	241	298.5	362	432
<b>D</b>	4X19MM	8X23MM	8X22MM	8X22MM	8X26MM	12X29MM	12X25MM
<b>Thickness</b>	3.2	3.2	3.2	3.2	3.2	3.2	3.2
<b>Code</b>	RFG80A150	RFG100A150	RFG125A150	RFG150A150	RFG200A150	RFG250A150	RFG300A150

