


# BSP Male Hosetail

## Features

- BSP Threaded Ends
- Working Pressure: 150lbs (psi) / 10bar
- Working Temperature: 250°C at 10bar
- Investment lost wax casting manufactured to ISO 9001 : 2015
- BSP thread conforms with ISO 7-1/ISO 228-1
- Male Threads are Tapered (BSPT)
- Mill Test Certificates (EN10201 Type 2.2) available with all sizes

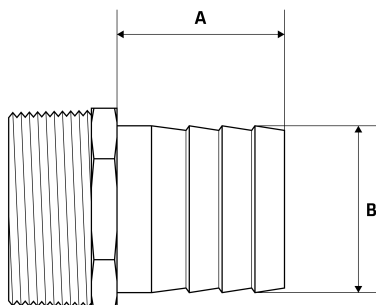

## Dimensions

Unit: mm (unless stated otherwise)

Size	1/8" 7x6NB	1/4"x7 7x8NB	1/4"x9 9x8NB	3/8" 9.5x10NB	1/2"x12.7 12.7x15NB	1/2"x15 15x15NB	3/4" 19x20NB
<b>A</b>	20.5	24.5	24.5	24.5	29.5	32	34
<b>B</b>	7	6	9	11	12.7	15	19
<b>Code</b>	SMH06	SMH08	SMH08-9	SMH10	SMH15	SMH15-15	SMH20

Size	1" 25.4x25NB	1 1/4" 31.8x32NB	1 1/2" 38.1x40NB	2" 50.8x50NB	2 1/2" 63.5x65NB	3" 76.2x80NB	4" 102x100NB
<b>A</b>	36	38	46.5	49.5	60	71	71
<b>B</b>	25.4	31.8	38.1	50.8	63.5	76.1	102
<b>Code</b>	SMH25	SMH32	SMH40	SMH50	SMH65	SMH80	SMH100

