


Table D/E Lugged Butterfly Valve

Features

- Table E threaded stud pattern
- Maximum nominal working pressure 230PSI / 16Bar
- EPDM seal temperature rating -20°C to 120°C
- EPDM is suitable for hot water, steam, alcohols, coolants, acids and bases.
- Lockable Lever with 10 position stainless steel notch plate.
- 350NB and 400NB are fitted with gearbox and wheel handle.
- Additional information of Mounting Plate dimensions available on request

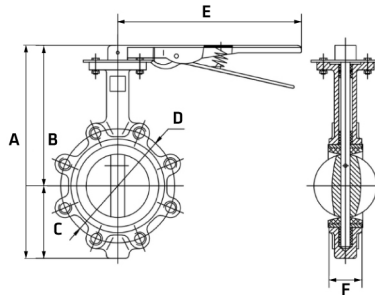

Dimensions

Unit: mm (unless stated otherwise)

Size	1 1/2" DN40	2" DN50	2 1/2" DN65	3" DN80	4" DN100	5" DN125	6" DN150
A	225	275	298	308	348	374	397
B	159	193	207	212	233	246	258
C	66	82	91	96	115	128	139
D	98	114	127	146	178	210	235
E	220	220	220	220	260	260	260
F	32	42	45	44.2	51.1	54.5	54.8
Code	CILBV40DE	CILBV50DE	CILBV65DE	CILBV80DE	CILBV100E	CILBV125DE	CILBV150E

Size	8" DN200	10" DN250	12" DN300	14" DN350	15" DN400
A	476	530	623	658	770
B	301	324	378	390	460
C	175	206	245	268	310
D	292	356	406	470	521
E	365	365	510	210	240
F	59.6	67	75.9	76	85
Code	CILBV200E	CILBV250E	CILBV300E	CILBV350E	CILBV400E

