


NOTES & FEATURES

MATERIAL: STAINLESS STEEL
 GRADE: SEE TABLE
 STANDARD: ASTM A554
 SURFACE FINISH: 320 GRIT
 PRESSURE: SEE TABLE(*)
 YIELD STRENGTH: 1700 BAR, TS USED IN BP
 ERRORS & OMISSIONS EXCEPTED

FEATURES:
 6M LENGTHS, PURCHASE PER METER
 EDDY CURRENT TESTED

(*) THESE ARE NOT GUARANTEED VALUES

VIEW ONLINE

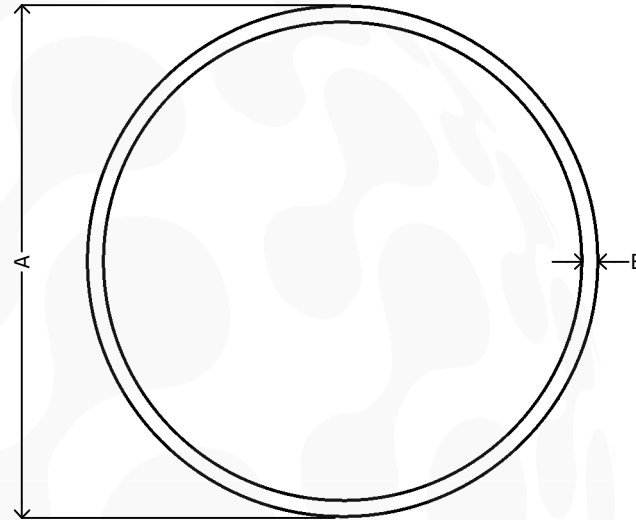

DIMENSIONS

CODE	SIZE	GRADE	A	B	-70°C TO +380°C		+380°C TO +538°C	
					WP (BAR)	BP (BAR)	WP (BAR)	BP (BAR)
					SGPT425	25.4 (1")	304/304L	25.4 (±0.15)
SGPT430	31.8 (1 1/4")	304/304L	31.8 (±0.15)	1.5	114	537	75	357
SGPT440	38.1 (1 1/2")	304/304L	38.1 (±0.15)	1.5	76	360	50	239
SGPT445	44.5 (1 3/4")	304/304L	44.5 (±0.15)	1.5	76	360	50	239
SGPT450	50.8 (2")	304/304L	50.8 (±0.15)	1.5	66	315	44	209
SGPT465	63.5 (2 1/2")	304/304L	63.5 (±0.15)	1.5	53	252	35	167
SGPT475	76.2 (3")	304/304L	76.2 (±0.15)	1.5	44	209	29	139
SGPT4100	101.6 (4")	304/304L	101.6 (±0.15)	1.5	33	157	22	104
SGPT4125	127.0 (5")	304/304L	127.0 (±0.15)	1.5	33	152	22	101
SGPT4150	152.4 (6")	304/304L	152.4 (±0.15)	1.5	22	105	14	69
SGPT4200	203.2 (8")	304/304L	203.2 (±0.20)	2.0	20	95	13	63
SGPT625	25.4 (1")	316/316L	25.4 (±0.15)	1.5	133	630	89	419
SGPT630	31.8 (1 1/4")	316/316L	31.8 (±0.15)	1.5	114	537	75	357
SGPT640	38.1 (1 1/2")	316/316L	38.1 (±0.15)	1.5	76	360	50	239
SGPT650	50.8 (2")	316/316L	50.8 (±0.15)	1.5	66	315	44	209
SGPT665	63.5 (2 1/2")	316/316L	63.5 (±0.15)	1.5	53	252	35	167
SGPT675	76.2 (3")	316/316L	76.2 (±0.15)	1.5	44	209	29	139
SGPT6100	101.6 (4")	316/316L	101.6 (±0.15)	1.5	33	157	22	104

THE METAL COMPANY TALK: 0508 304 316 TYPE: sales@themetalscompany.co.nz VISIT: 149 Alabama Rd, Blenheim 7201, NZ	FILE NAME TMC-SGPT			CODE SGPT	SIZE 25.4 (1") TO 203.2 (4")
	AUTHOR CALEB G.	FOR THE METAL COMPANY		DESCRIPTION STAINLESS STEEL GENERAL PURPOSE TUBE ASTM A554	
	APPROVED BRENTLY F.	CO. S. FISHER & SONS			
	REVISION 2.0	SHEET A4	SCALE N.T.S.	DATE 03/10/24	