


Pipe Flange Table E

AS2129, ASTM A182

Features

- To suit Schedule Pipe
- Manufactured to AS2129 Table E Standard (*)
- Forged to ASTM A182
- Flat Faced Slip On Flange (FFSO/SOFF)
- All sharp edges have been chamfered by 0.5 mm at 45°
- (*) Please note that sizes 15NB (1/2") to 40NB (1 1/2") do not meet AS2129 thickness. The thickness has been increased to avoid unacceptable warpage that can occur at standard thickness, as recommended in the standard. These flanges will be denoted as "NON STANDARD".

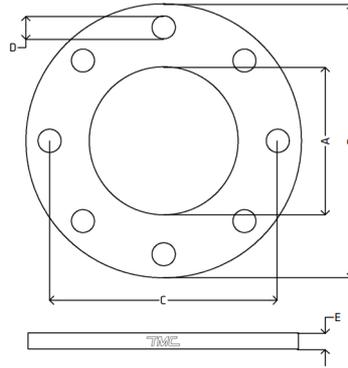

Dimensions

Unit: mm (unless stated otherwise)

Size	1/2" 15NB	3/4" 20NB	1" 25NB	1 1/4" 32NB	1 1/2" 40NB	2" 50NB	2 1/2" 65NB
A	22.3	27.6	34.5	43.1	49.5	61.9	74.6
B	95.0	100.0	115.0	120.0	135.0	150.0	165.0
C	67.0	73.0	83.0	87.0	98.0	114.0	127.0
D	4x14.0	4x14.0	4x14.0	4x14.0	4x14.0	4x18.0	4x18.0
E	12.0	14.0	12.0	12.0	12.0	12.0	10.0
Thickness	12.0	14.0	12.0	12.0	12.0	12.0	10.0
Code	SPF15E	SPF20E	SPF25E	SPF32E	SPF40E	SPF50E	SPF65E

Size	3" 80NB	4" 100NB	5" 125NB	6" 150NB	8" 200NB	10" 250NB	12" 300NB
A	90.6	116.0	143.7	170.6	221.4	276.3	327.1
B	185.0	215.0	255.0	280.0	335.0	405.0	455.0
C	146.0	178.0	210.0	235.0	292.0	356.0	406.0
D	4x18.0	8x18.0	8x18.0	8x22.0	8x22.0	12x22.0	12x26.0
E	11.0	13.0	14.0	17.0	19.0	22.0	25.0
Thickness	11.0	13.0	14.0	17.0	19.0	22.0	25.0
Code	SPF80E	SPF100E	SPF125E	SPF150E	SPF200E	SPF250E	SPF300E



Size	14" 350NB	16" 400NB
A	359.1	410.4
B	525.0	580.0
C	470.0	521.0
D	12x26.0	12x26.0
E	29.0	32.0
Thickness	29.0	32.0
Code	SPF350E	SPF400E

