


BSP Flat Face Mac Union

Features

- BSP Threaded Ends
- Working Pressure: 150lbs (psi) / 10bar
- Working Temperature: 250°C at 10bar
- Investment lost wax casting manufactured to ISO 9001 : 2015
- BSP thread conforms with ISO 7-1/ISO 228-1
- Female Threads are Parallel (BSPP)
- Mill Test Certificates (EN10201 Type 2.2) available with all sizes
- Flat Faced Union
- EPDM Gasket Included, But Can Be Sold Separately.
- Please Note, we are changing the gasket to an O-Ring as our new orders arrive. Some existing stock will still have flat section gasket.

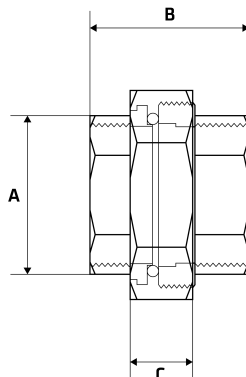

Dimensions

Unit: mm (unless stated otherwise)

Size	1/4" 8NB	3/8" 10NB	1/2" 15NB	3/4" 20NB	1" 25NB	1 1/4" 32NB	1 1/2" 40NB
A	18	22	27	32	38	49	56.5
B	38	42	44	49	49	60	66
C	15.6	14.4	17.3	18.8	19.3	25.9	24.6
Code	SMU08F	SMU10F	SMU15F	SMU20F	SMU25F	SMU32F	SMU40F

Size	2" 50NB	2 1/2" 65NB	3" 80NB	4" 100NB
A	69.8	81.8	95.8	121.5
B	69	74	88	110
C	27.5	27.8	28.8	34
Code	SMU50F	SMU65F	SMU80F	SMU100F

